Phone booth M, by Kettal Studio

Description


Privacy can be hard to come by in large open offices. Our Phone booth O allows your employees to make calls or hold video conferences with unbroken focus and without disturbing the rest of the team. The Phone booth O design is inspired by the traditional telephone booth. They are an elegant yet functional solution for your office. Comfortable and echo-free, the Phone booth O is also simple to install

| | Height | Width | Length |
|----|-------------|-------------|-------------|
| S | 240 / 94,5" | 117 / 46 | 117 / 46 |
| L | 240 / 94,5" | 217 / 85,4" | 117 / 46 |
| XL | 240 / 94,5" | 217 / 85,4" | 217 / 85,4" |

Bespoke sizes on demand



Isometric view

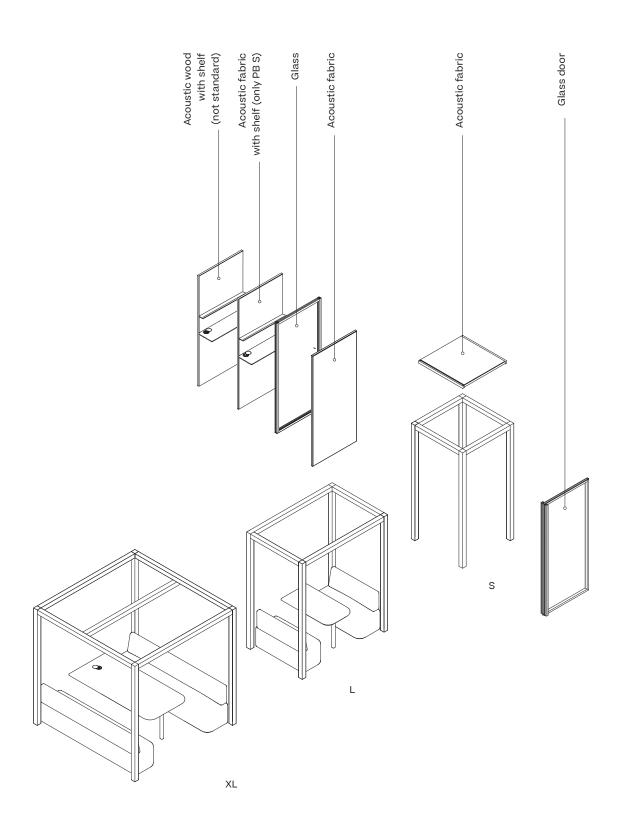

Features

Designer Collection Phone Booth



Table with Plug / USB- A / USB-C



High or low table with Lamp / Plug / USB-A / USB-C (**)



Shelf + Led light + PIR (*)



Handicap flooring, pivoting door



LED track curtain




Ventilation system 37,4 m³/h



Motion sensor PIR



Plug and play



Hanger (*)

Description

A phone booth with one seat. Ideal to join a call or video conference with your client, free from all distractions. The exceptional acoustics and physical comfort allow for better communication, as well as concentration.

Specifications

- Single or double glazed wall system
- · Pivot door
- Metal frame
- · Acoustic panels
- · Absorption system
- · Fabric or glass
- · Faced external wall
- · Air ventilation system
- · LED lighting
- PIR sensor



Version A



3 fabric sides + glass door


Version B



2 fabric sides & 1 glass side + glass door

Does not include bar stool.

Detailed dimensions

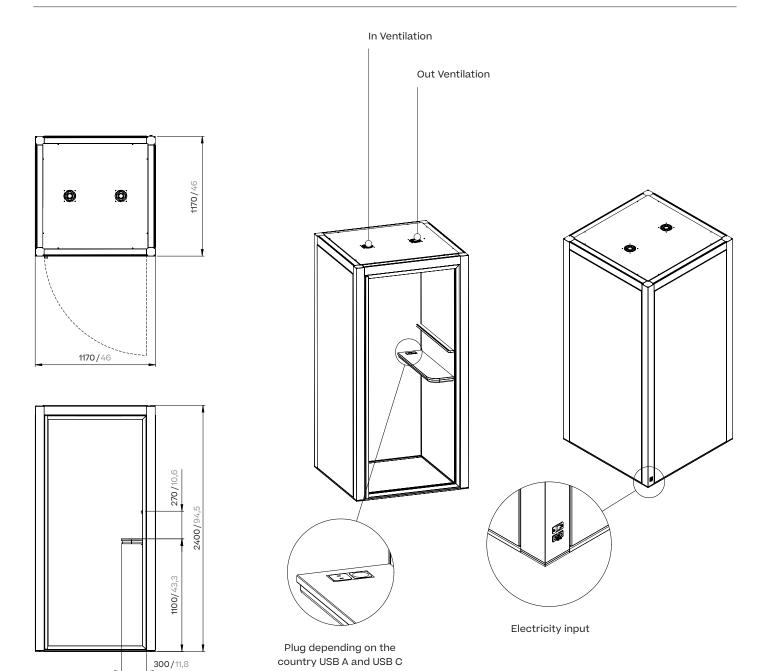



S Phone Booth Light




Phone booth S

S Phone Booth Light

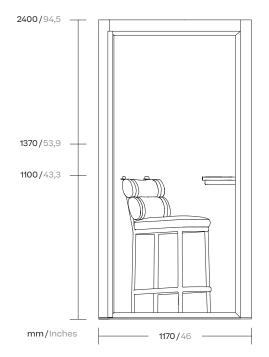

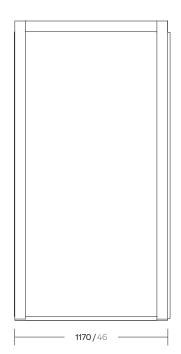





Specifications

- Spring-free door
- Not carpet included
- · Aluminium structure
- 2 Fabric sides & 1 ceiling (Relate Fabrics)
- Compact Wood table, shelf & door handle
- · Table socket & USB
- Motion sensor PIR
- Power cable (3m)
- LED Track curtain left & right sides
- In / outflow ventilation system 37,4 m³/h
- Glass door
- Entry free space 837 / 33













kettal


9


S Phone Booth 'A' (Fabric in back side)




Phone booth S

S Phone Booth 'A' (Fabric in back side)

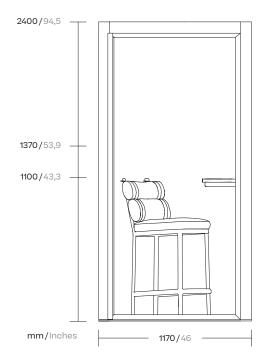

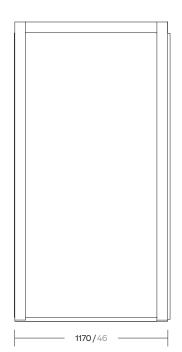






Specifications

- · Aluminium structure
- 3 Fabric sides & 1 ceiling (Relate Fabrics)
- · Glass door
- Compact Wood table, shelf & door handle
- Table socket & USB
- Motion sensor PIR
- Power cable (3m)
- LED Track curtain left & right sides
- In / outflow ventilation system 37,4 m³/h
- Floor carpet
- Hange
- Entry free space 837 / 33




^{*} Does not include barstool


S Phone Booth 'B' (Glass in back side)




Phone booth S

S Phone Booth 'B' (Glass in back side)

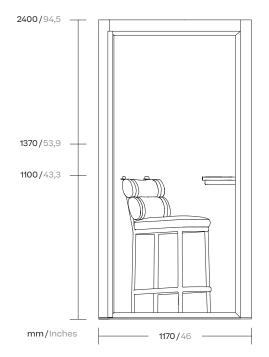

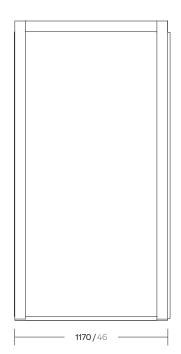





Specifications

- Aluminium structure
- 2 Fabric sides & 1 ceiling (Relate Fabrics)
- 1 Glass panel
- Glass door
- Compact Wood table, shelf & door handle
- Table socket & USB

- Motion sensor PIR
- Power cable (3m)
- LED Track curtain left & right
- In / outflow ventilation system 37,4 m³/h
- Floor carpet
- Entry free space 837 / 33









* Bar stool not included

Description

A phone booth with 2 seats. Convenient to sit down for one-on-one meetings in private. The exceptional acoustics and physical comfort allow for better communication, as well as concentration.

Specifications

- Single or double glazed wall system
- Pivot door
- Metal frame
- Acoustic panels
- Absorption system
- Fabric or glass
- Faced external wall
- Air ventilation system
- LED lighting
- · PIR sensor



Phone booth L

Version A



Fabric in back side + Sofa O

Version C



Fabric in back side

Version B




Glass in back side glass + Sofa O


Version D




Glass in back side glass

Detailed dimensions





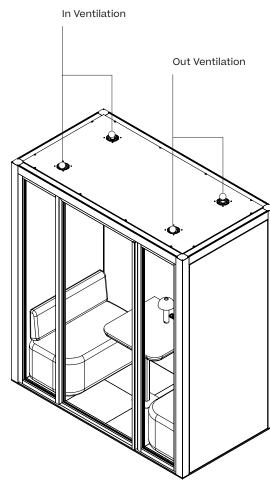








Table dimensions





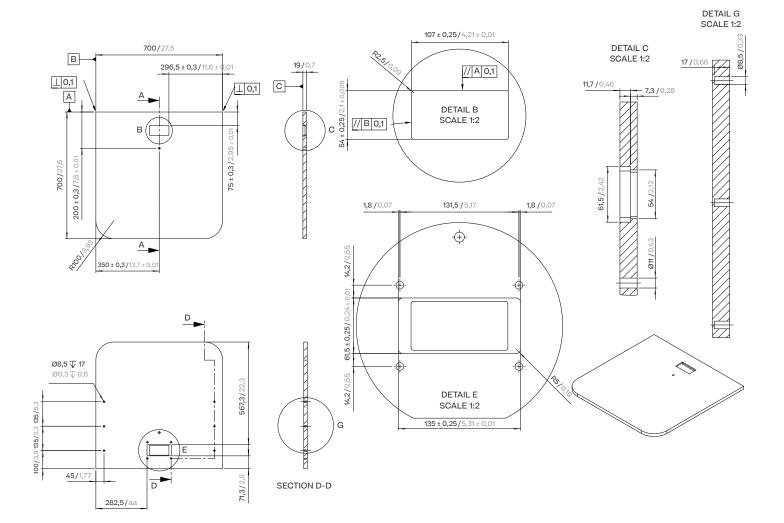

Sofa dimensions

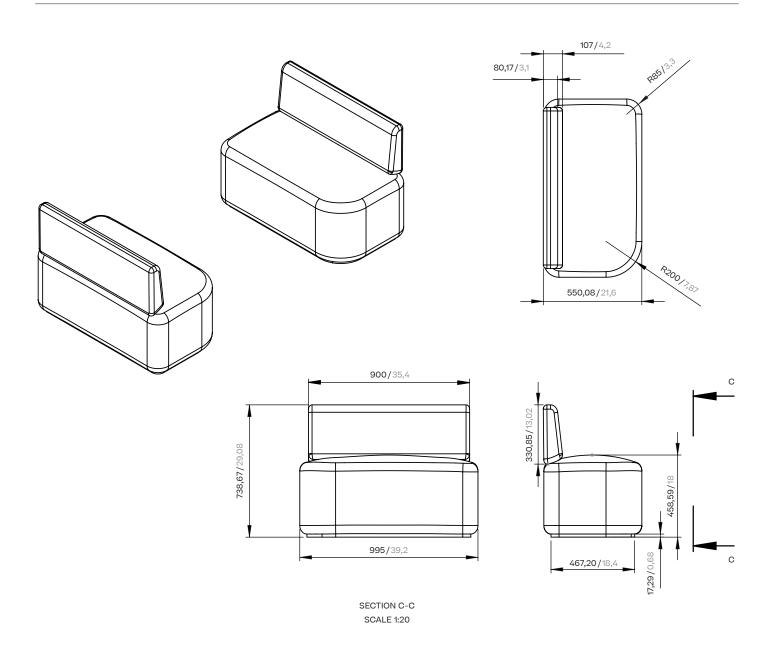



L Phone Booth 2 PAX 'A' (Fabric in back side)




Phone booth L

L Phone Booth 2 PAX 'A' (Fabric in back side)

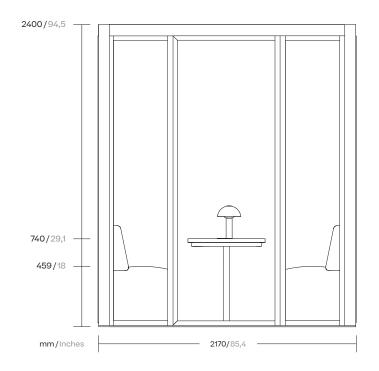


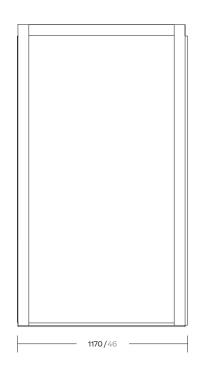

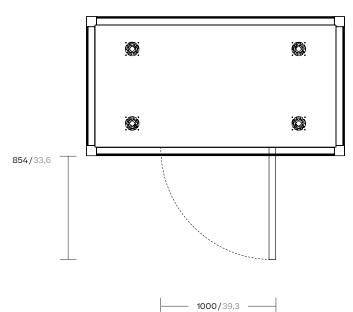

Specifications


- · Aluminium structure
- 3 Fabric sides & 1 ceiling (Relate Fabrics)
- · Relate fabrics sofas
- Glass door
- Compact Wood table, & door handle
- · Table socket & USB
- Motion sensor PIR
- · Power cable (3m)
- · LED Track curtain back side
- In / outflow ventilation system 74,9 m³/h
- Floor carpet
- · Aluminium dot lamp
- Entry free space 837 / 33





L Phone Booth 2 PAX 'B' (Glass in back side)



L Phone Booth 2 PAX 'B' (Glass in back side)

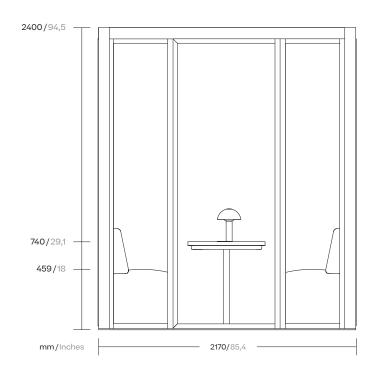


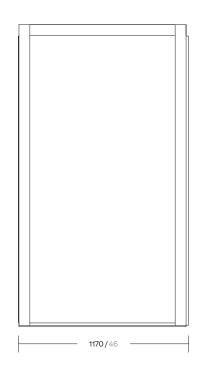

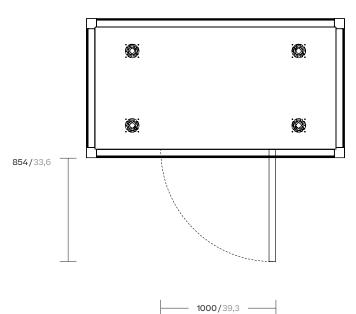

Specifications

- · Aluminium structure
- 2 Fabric sides &1 ceiling (Relate Fabrics)
- · Relate fabrics sofas
- · 1 Glass panel
- Glass door
- Compact Wood table, & door handle
- Table socket & USB
- Motion sensor PIR
- · Power cable (3m)
- · LED Track curtain back side
- In / outflow ventilation system 74,9 m³/h
- Floor carpet
- · Aluminium dot lamp
- Entry free space 837 / 33





L Phone Booth 2 PAX 'C'. High table (Fabric in back side)




Phone booth L

L Phone Booth 2 PAX 'C'. High table (Fabric in back side)

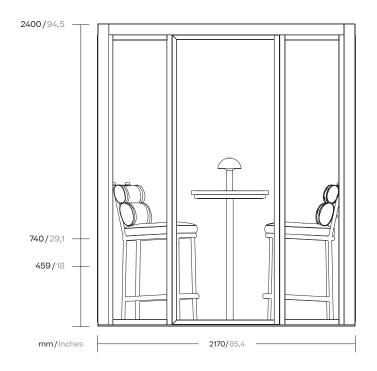

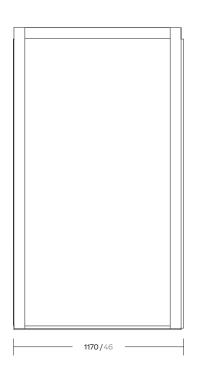




Specifications

- · Aluminium structure
- 3 Fabric sides & 1 ceiling (Relate Fabrics)
- · Glass door
- Compact Wood table, & door handle
- Table socket & USB
- · Motion sensor PIR

- · Power cable (3m)
- · LED Track curtain back side
- In / outflow ventilation system 74,9 m³/h
- Floor carpet
- · Aluminium dot lamp
- Entry free space 837 / 33




* Stool not included


L Phone Booth 2 PAX 'C'. High table (Fabric in back side)




Phone booth L

L Phone Booth 2 PAX 'C'. High table (Fabric in back side)

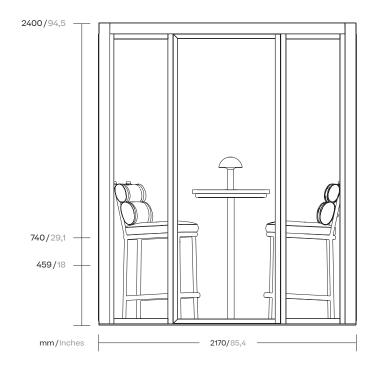


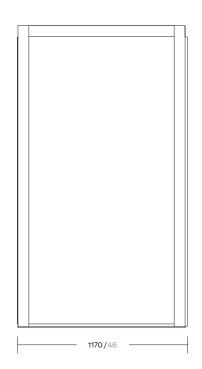

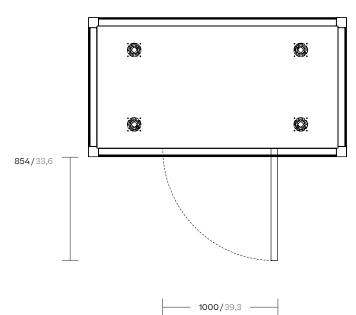

Specifications

- · Aluminium structure
- 2 Fabric sides & ceiling (Relate Fabrics)
- 1 Glass panel
- Glass door
- Compact Wood table, & door handle
- Table socket & USB
- Motion sensor PIR
- · Power cable (3m)
- LED Track curtain back side
- In / outflow ventilation system 74,9 m³/h
- Floor carpet
- · Aluminium dot lamp
- Entry free space 837 / 33



* Stool not included

Description

A Phone Booth with 4 seats. Ideal for meetings in spacious comfort and privacy.

The exceptional acoustics and physical comfort allow for better communication, as well as concentration.


Specifications

- Single or double glazed wall system
- Pivot door
- Metal frame
- Acoustic panels
- Absorption system
- · Fabric or glass
- Faced external wall
- Air ventilation system
- LED lighting
- PIR sensor




Phone booth XL

Version A

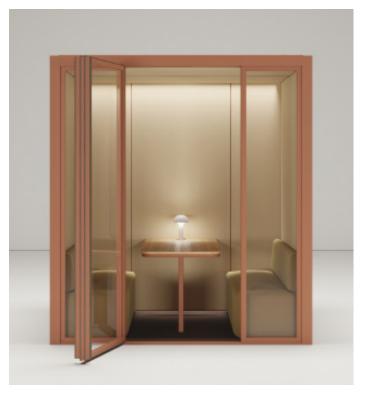

Fabric in back side + Sofa M

Version C

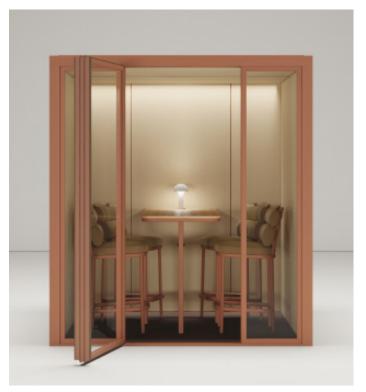

Fabric in back side

Version B




Glass in back side glass + Sofa M

Version D




Glass in back side glass

Detailed dimensions

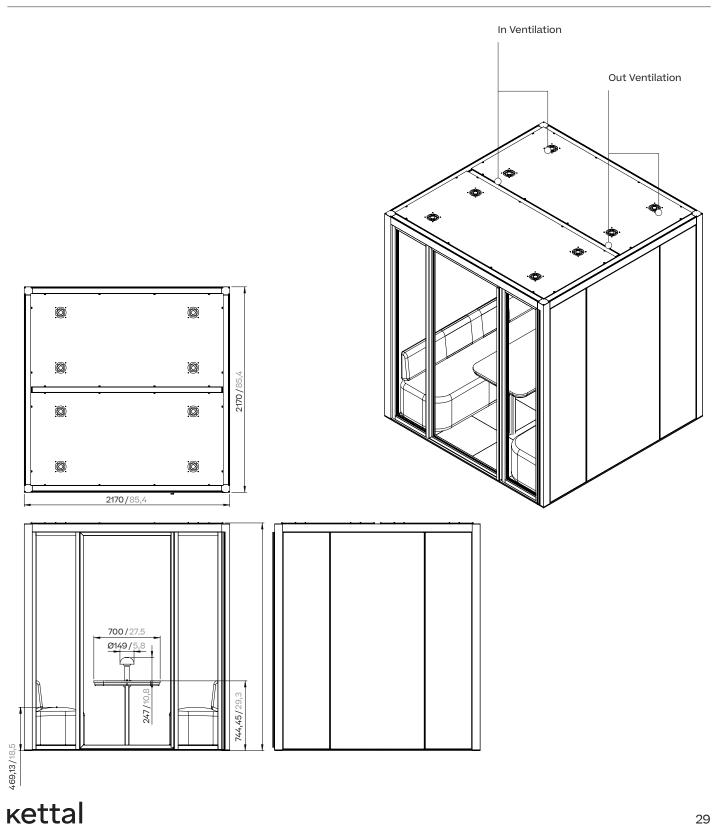


Phone booth XL

Table. Detailed dimensions

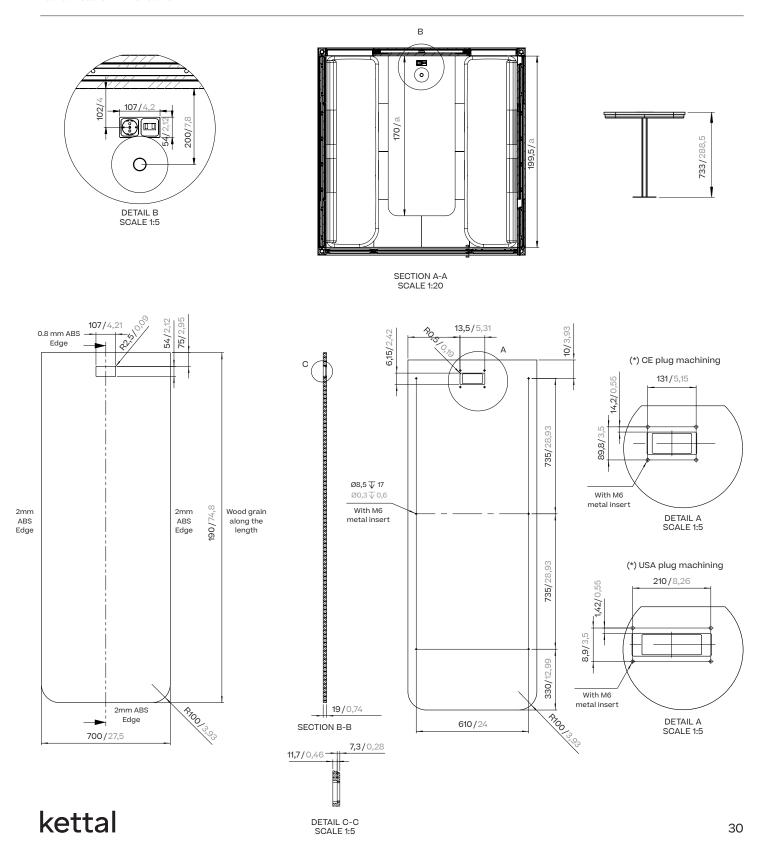



XL Phone Booth 4 PAX 'A' (Fabric in back side)

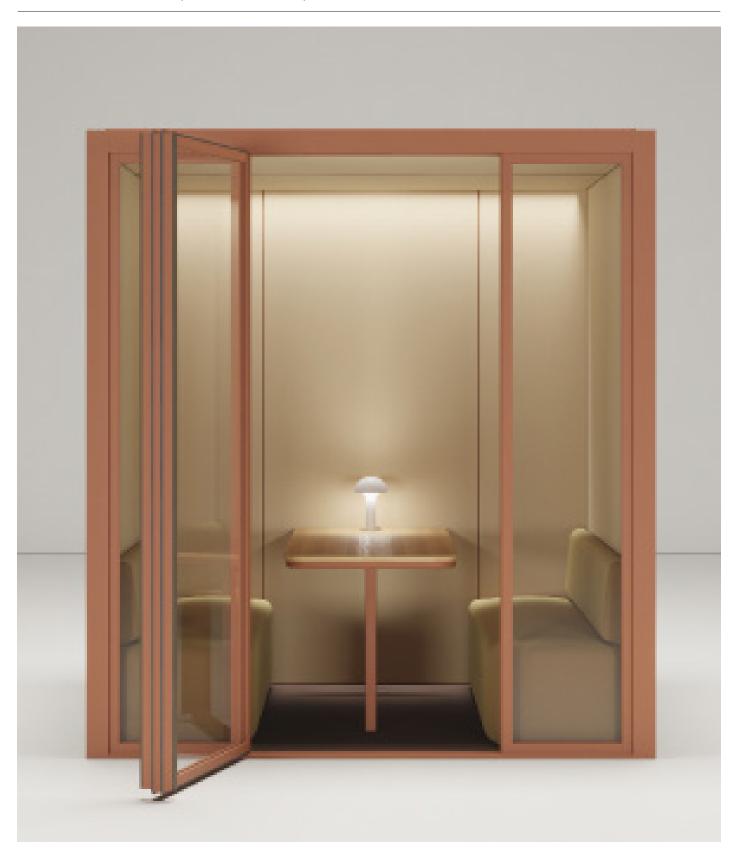


XL Phone Booth 4 PAX 'A' (Fabric in back side)

Phone booth L

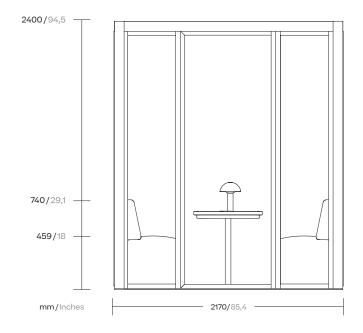






1000/39,3 —

Specifications

- · Aluminium structure
- 3 Fabric sides & 1 ceiling (Relate Fabrics)
- Relate fabrics sofas
- · Glass door
- Compact Wood table, & door handle
- · Table socket & USB

- Motion sensor PIR
- Power cable (3m)
- LED Track curtain back side
- In / outflow ventilation system 149,8 m³/h
- Floor carpet
- · Aluminium dot lamp
- Entry free space 837 / 33



kettal


854/33,6


XL Phone Booth 4 PAX 'B' (Glass in back side)




XL Phone Booth 4 PAX 'B' (Glass in back side)

Phone booth L

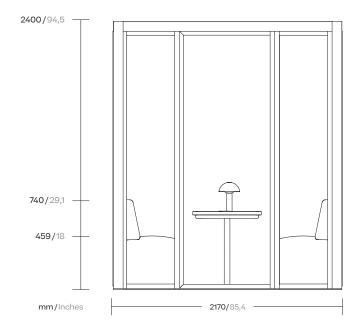




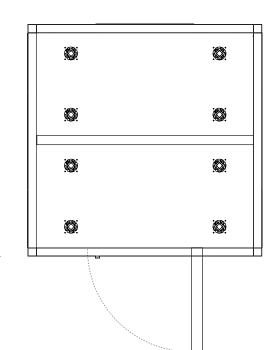

1000/39,3 —

Specifications


- · Aluminium structure
- 2 Fabric sides & 1 ceiling (Relate Fabrics)
- Relate fabrics sofas
- · 1 Glass panel
- · Glass door
- Compact Wood table, & door handle
- Table socket & USB
- Motion sensor PIR
- Power cable (3m)
- · LED Track curtain back side
- In / outflow ventilation system 149,8 m³/h
- Floor carpet
- · Aluminium dot lamp
- Entry free space 837 / 33



kettal


854/33,6


XL Phone Booth 4 PAX 'C'. High table (Fabric in back side)

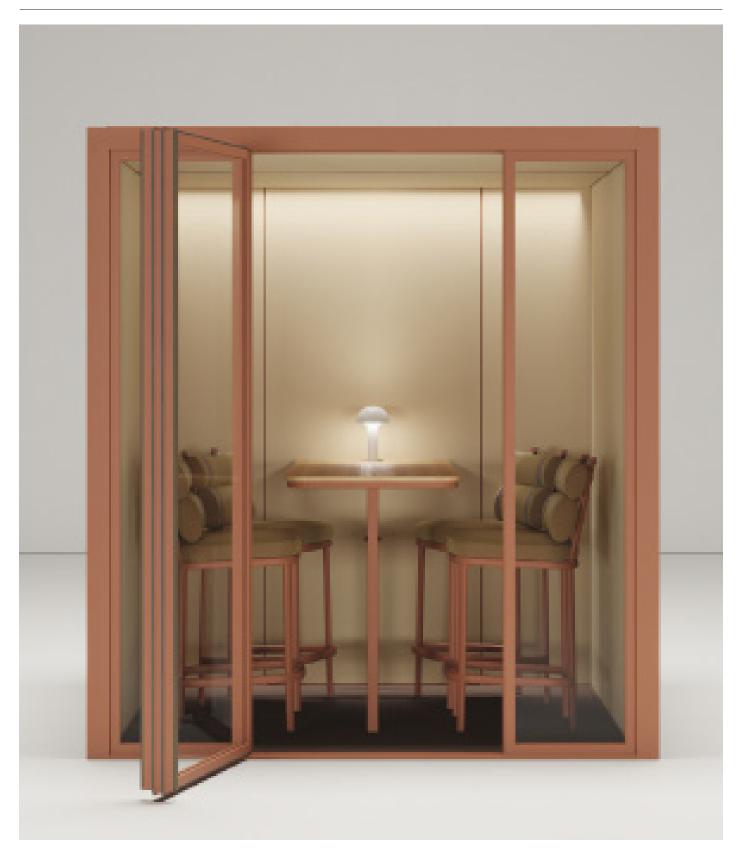


Phone booth L

XL Phone Booth 4 PAX 'C'. High table (Fabric in back side)

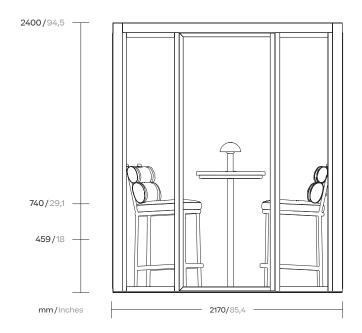



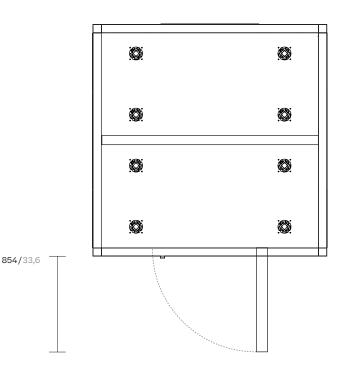

1000/39,3 —

Specifications

- · Aluminium structure
- 3 Fabric sides & 1 ceiling (Relate Fabrics)
- Relate fabrics sofas
- · Glass door
- Compact Wood table, & door handle
- · Table socket & USB

- Motion sensor PIR
- Power cable (3m)
- LED Track curtain back side
- In / outflow ventilation system 149,8 m³/h
- · Floor carpet
- Aluminium dot lamp
- Entry free space 837 / 33





XL Phone Booth 4 PAX 'D'. High table (Glass in back side)



Phone booth L

XL Phone Booth 4 PAX 'D'. High table (Glass in back side)

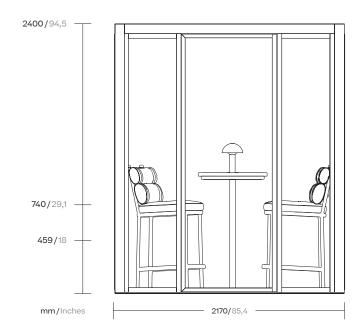




1000/39,3 —

Specifications

- · Aluminium structure
- 2 Fabric sides & 1 ceiling (Relate Fabrics)
- Relate fabrics sofas
- · 1 Glass panel
- · Glass door
- Compact Wood table, & door handle
- Table socket & USB
- Motion sensor PIR
- Power cable (3m)
- · LED Track curtain back side
- In / outflow ventilation system 149,8 m³/h
- Floor carpet
- · Aluminium dot lamp
- Entry free space 837 / 33



kettal

854/33,6

Phone booth, Technical specifications

Designer Kettal Studio Collection Phone Booth

Lighting

LED Track Curtain

A recessed lighting system equipped with an LED light source. Specially designed for wall-washer lighting, the LED Curtain incorporates lenses to provide optimum light distribution. The LED Curtain range is available in different lengths which means it can be adjusted to suit any space, while its compact size facilitates simple integration within the Phone booth system.









4,7/1,8 ___


Cm/Inches



Table mounted outlets

Hardware

- · Simple design
- Power Connections
- · USB A + USB C
- · Plug and outlet types (UK, FRA, US, SUI, AUS,...)



cm/Inches



Phone booth, Acoustics

Acoustics

Description

All our panels are tested to ensure they meet the required acoustic levels. We have tested some of the wall combinations to provide guidelines with regard to acoustic levels. Acoustic performance varies depending on the material selection for each wall.

The M glass version offers excellent acoustic performance, creating a comfortable and efficient working environment. It is based on 3+3 and 6+6 laminates with a soundproofing membrane to provide an impressive acoustic performance of up to 44dB. We also offer a range of solid wall options in fabric and wood. Many of these alternative wall options offer excellent acoustic performance properties. Our laminated panels not only provide additional acoustic performance, but also come in a range of colors. As a result, you can customize your Pavilion M to reflect your brand image or simply to create a bright office space. In addition, the eco-friendly panels reduce and control reverberated noise within the Pavilion, further enhancing the overall soundproofing performance.

Key functions


- · All materials are fire retardant M1
- · Memory acoustic foam
- · Easy clean material
- · Odor free and antimicrobial






Acoustic panels

Acoustic Panel Comfort (36 dB)

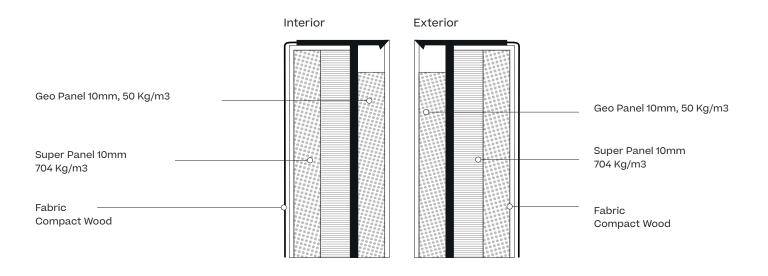


Acoustic Panel Plus (41 dB)

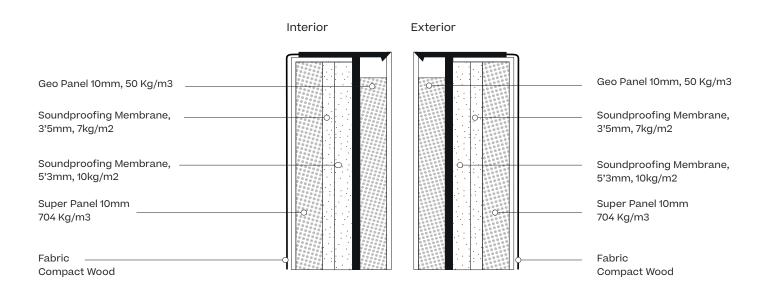




Acoustic panels

Acoustic Glass Comfort (34 dB) / Plus (38 dB)

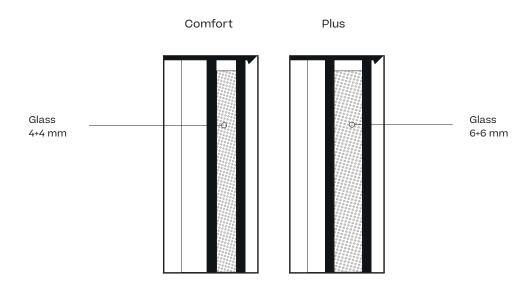

Nuvola / PET Acoustic Ceiling

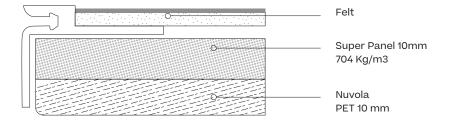




Acoustics

Designer Kettal Studio Collection Phone Booth

Ceiling Panel Nuvola

28 dBa



Acoustic ceiling

R_W (C;Ctr)=30(-2;-4)dB R_A =28dBA


Acoustic Side Panel

Comfort

Plus

36/41 dBa





Plus Acoustic side panel

R_W (C;Ctr)=45(-4;-11)dB R_A =41dBA


Acoustic Glass & Glass Door

Comfort

Plus

34/38 dBa





Comfort Acoustic Glass 4+4 mm - inch


Plus Acoustic Glass 6+6 mm - inch

R_w (C;Ctr)=39(-1;-3)dB R_A =38dBA

Average reverberation

0,2 RT





Plus Acoustic Glass

0.2 RT

Phone booth Aesthetics & materiality

Materials

Structural Aluminium

Extruded and hollow profiles of this alloy will be used to build up the structures of each booth.

This is a light and ductile alloy, with great strength and magnificent finishing characteristics. It is ideal for works that require high quality and perfect finishes.

It has excellent corrosion resistance, similar to that of stainless steel. Follows the UN-EN-AW 10204 3-1 regulation.

Kettal uses 80% recycled aluminum in the extrusion of its profiles in order to reduce greenhouse gases, thus contributing to a more sustainable production of our customers' products.



Recyclable




80% recycled



Local supplie

Chemical composition (UN-EN 10204 3-1 Regulation)

| % | Min. Máx. | |
|----|--------------|--|
| Si | 0.30 0.60 | |
| Fe | 0.10 0.30 | |
| Cu | - 0.10 | |
| Mn | - 0.10 | |
| Mg | 0.35 0.60 | |
| Cr | - 0.05 | |
| Zn | - 0.15 | |
| Ті | - 0.10 | |
| | | |

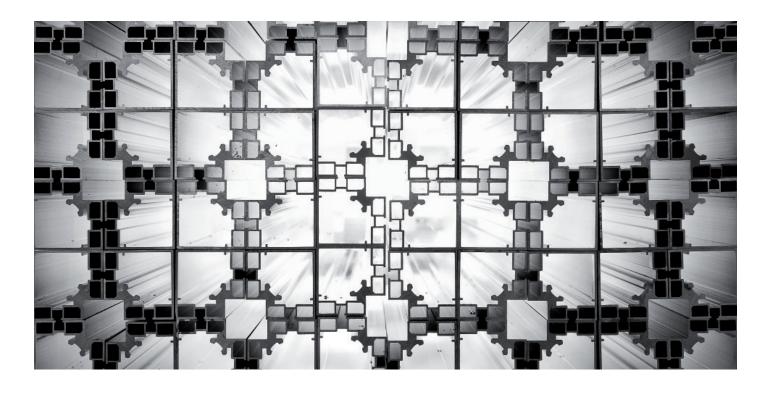



Technical wood

The technical wood is one of the main components to create the acoustic lateral panel and ceiling.

10mm fire-fighter.

Complies with E1 regulation

The environmental product declaration is in accordance with ISO 14025 and EN 15804.

Comply with standards EN 622-1, EN 622-5 and EN 14322. They are considered reliable products used as raw material for the construction and furniture industry.

| Characteristics | Test | Units |
|---------------------------------|--------------------------------|-----------------|
| Density | EN 323 | kg/m3 |
| Flexural strength | EN 310 | N/mm2 |
| Formaldehyde emission | EN 717-1 | ppm |
| Reaction to fire | EN 13501-1 | Euroclase |
| Absorption acoustic coefficient | UNE EN 13986:2006+A 1 :2015 | α |
| Acoustic insulation | UNE EN 13986:2006+A 1 :2015 | db |
| Biological durability | UNE EN 335 | Clase de uso |



Type 2 From cradle to gate with options



ocal supplier







Soundproof Safety Glass

6 mm / 1 PVB / 6 mm

Soundproof safety glass, consists of two or more glass sheets joined by one or more Polyvinyl Butiral (PVB) films,

Direct acoustic isolation 39 dB.

If a laminated glass is broken, the PVB film retains a large part of the glass fragments, that is, the residual strength and the maintenance of the glazing are kept in the same place until they are replaced.

These glasses filter 99% of the UV rays and contribute to extend the life of curtains, rugs, fabrics, objects, etc., which are exposed daily to natural light.

It offers protection against a need for security and complies with the requirements of current norms and regulations, both for homes, shops or offices.

In case of breakage, the fragments remain attached to the sheet.

Chemical composition

| SiO ₂ | 69 - 74 % |
|----------------------|-----------|
| Na ₂ O | 10 - 16 % |
| CaO | 5 - 14 % |
| MgO | 0 - 6 % |
| $\overline{Al_2O_3}$ | 0 - 3 % |
| Others | 0 - 5 % |







Soundproof safety glass







Materials Aesthetics & Materiality

Designer Kettal Studio Collection Phone Booth

Terrain Paints

Terrain Paints are designed for aluminum profile coatings used in architecture and for other substrates where maximum outdoor resistance is paeded.

It is a powder coating formulated with polyester resins and free of TGIC, pigments and additives. They offer excellent exterior durability with very good gloss retention and color stability.

Certificates



















Class A2



Polymerization



Local supplier



Materials

Terrain Paints

| | | Method |
|-------------------------------|--|--|
| 24 to 150 °C / 75,2 to 302 °F | 26 to 150 °C / 78,8 to 302 °F | Total time |
| 6 | 9 | ISO 2813 |
| 30 | | ISO 2813 |
| 30 | | ISO 2813 |
| 0 | 0 | ISO 2813 |
| 5 | 11 | ISO 2813 |
| | 6 | ISO 2813 |
| 50 | 55 | MALVERN |
| 80 | 95 | MALVERN |
| 50 | 65 | MALVERN |
| 4 | 8 | MALVERN |
| | VISUAL | CIELAB |
| Textured | | NIZI-001 |
| | 6 30 30 0 5 50 80 50 4 | 6 9 30 30 0 0 5 11 6 50 55 80 95 50 65 4 8 |





Manganese 32C

Materials

Aesthetics & Materiality

Designer Kettal Studio Collection Phone Booth

Kvadrat Relate Fabrics

Relate is a sophisticated twill weave upholstery textile designed by Patricia Urquiola made from Trevira CS, which has a soft hand resembling natural fibres.

The versatile palette for Relate comprises 35 colourways and expresses confident colour combinations by combining warm notes with closely related nuances.

Relate is suitable for contract and private use.



Suitable for indoor use only

Care instructions











Regular care

Regular cleaning is important in order to keep the upholstery textile looking its best and to prolong its life. Dust and dirt wear down the textile and also reduce its re-retardant properties.

Vacuum frequently, ideally every week, at half power where appropriate. Wipe upholstery fabrics made from polyurethane with a dry or moist cloth. May also be vacuum cleaned with a soft brush.





Designer Kettal Studio

Materials

Technical specifications

| Composition | 100% Trevira |
|---------------------------|--|
| Width | Approx. 140 cm |
| Weight per m ² | Approx. 328/m² |
| Fire test | AS/NZS 3837 class 2, BS 5852 Crib 5, BS 5852 part 1 with treatment, DIN 4102 B1, EN 1021-1/2, IMO FTP Code 2010 Part 8, NF D 60 013, NF P 92 503 M1, NFPA 701, SN 198 898 5.2, UN 9177 Classe 1, US 1 Cal. Bull. 117-2013, ÖNORM B1/Q1 |
| Lightfastness | 5-7 (ISO 1-8) |
| Shrinking | App 2% |
| Abrasion Martindale | 80.000 Martindale |
| Wash load | Half |
| Pilling | 4-5 (ISO 1-5) |
| Colour | Slight differences may occur |
| Produced in environment | Greenguard Certification www.greenguard.org |
| | |

Colors



Materials

Aesthetics & Materiality

Designer Kettal Studio Collection Phone Booth

Recycled Cotton Wool

- 1. Ecological Product. Bio-sustainable. 80% recycled and 100% recyclable.
- 2. Safe in its installation: It does not cause discomfort or itching as it is based on natural fibers.
- 3. Elastic product. Does not break when folding. Its modulus of elasticity compared to rock wool is: 7 times better.

It does not promote combustion. Fire classification: M1 Certified 09/32300075 and 76 + according to UNE 23721-90, EN 13501-1.



Type 2 From cradle to gate with options



Local supplier



Recyclable



Nuvola

Nuvola is a soft material used exclusively on Pavilion O's side and roof panels. This material has excellent acoustic properties, and its soft texture, along with a wide range of colors, offers versatility, creating a welcoming space.

Suitable for indoor use only

Technical specifications

Composition 100% Polyester made from recycled water/

soda bottles without use of adhesives or

other bolding agents

Thickness (mm) 12 (+/-1)

Weight (kg) 9mm: 1220 * 2240 mm sheet = 5.40 kg

12mm: 1220 * 2240 mm sheet = 6.60 kg

9mm: 200 Density (kg/m3)

Environmental

12mm: 185

Fire testing **ASTM Class A**

Low-VOC, min 40% recycled PET

100 recyclable

Sound absorption NRC 0.85 (20mm airgap)

NRC 0.45 (direct surface mounting)

Colour Options



Andina Grey PF1



Ibizenca Sand PF2



Hickory Brown PF3



Baja Dunes PF4



Iron Ore PF5



Clary Sage PF6



Materials Aesthetics & Materiality

Designer Kettal Studio Collection Phone Booth

Soundproofing Membrane

High-density, polymer-based, asphalt-free synthetic soundproofing membrane.

Note


No substances including in the LIST OF PROHIBITED SUBSTANCES in CRADLE TO CRADLE CERTIFIED PRODUCTS PROGRAM are used in the manufacturing of the product range Soundproofing Membrane so those substances are not expected to be on the final product.

Restricted Substances (REACH Annex 17)"

The item(s) stated within section "2" of this declaration satisfy the requirements that are defined in Tille VIII of Regulation (EC) No. 1907/2006 (REACH regulation }, including the restrictions listed in Annex 17 of REACH.

Link: htt12s://echa.euro12a.eu/substances-restricted-under-reach



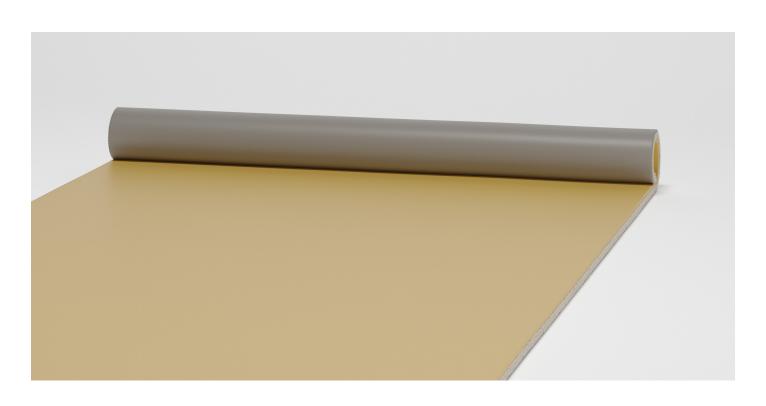



Designer Kettal Studio Collection Phone Booth

Materials

Soundproofing Membrane

| Characteristics | Testing method | Tecsoundsy | Units |
|----------------------------------|-------------------|------------|--------|
| Density | - | 2.010 | kg/m³ |
| Tensile strength | NT-67 | >30 | N/50mm |
| Elongation | NT-67 | >500 | % |
| Fold | EN 1109 | -20 | °C |
| Fire classification | UNE-EN 13501-1 | Bs2d0 | - |
| Resistance factor to water steam | UNE-EN 1931 met B | μ>1806 | - |
| Water absorption (24h at 23°C) | 1S062 met 1 NT74 | 0,003 | % |
| Shore A hardness | NT74 | 30±10 | |

| Regulation or protocol | Conclusion | Version of regulation of protocol |
|--------------------------|------------|--|
| French VOC Regulation | A + | Regulation of March and April 2011 (DEVL1101903D and DEVL1104875A) |
| French CMR components | Pass | Regulation of March and April 2011 (DEVL1101903D and DEVL1104875A) |
| AgBB/ABG | Pass | Anforderungen an bauliche Anlagen bezüglich des Gesundheitsschutzes (ABG), Entwurf 31.08.2017 |
| Belgian Regulation | Pass | Royal decree of May 2015 (C-2014/24239) |
| Indoor Air Comfort® | Pass | Indoor Air Comfort 6.0 of February 2017 |
| Indoor Air Comfort GOLD® | Pass | Indoor Air Comfort GOLD 6.0 of February 2017 |
| Blue Angel (RAL UZ 132) | Fail | Low-Emission Thermal Insulation Material and Suspended Ceilings for Use in Buildings, October 2010 |
| BREEAM International | Compliant | GN22 v2.2 (August 2017): BREEAM Recognised Schemes for VOC Emissions from Building Products |
| LEED v4 (outside U.S.) | Compliant | LEED v4 for Building Design and Construction (April 2015) |



Phone booth Technical data

Power

Voltage Input: 100-240VAC (single-phase)
Frecuency Input: 50-60Hz
Avaliable system power: 16A (The electrical system is designed to support up to the right power)
NETWORK line – RJ45 POE+
Outlets support up to a total of 10A.

Power connection

Connection through one side of a column



Illustration 2 - Power and data connection through column side

When:

If the client does not have a raised floor and needs a surfacelaid connection to the pavilion, the client must select this type of connection for the room.

How.

The column selected as "power supply and data input" will have a (male) surface connector.

The client must provide a power line up to that point.

To make the connection, Kettal provides a connector with a selected country plug to plug directly into the office socket.

Required cable

AWG 14 3 x 2,5 mm² Cu 450/750B H05ZZ




Control

Sensor - STD format

Operation through presence sensor: When the user enters, the lighting and ventilation are turned on. When the user leaves, after 15 minutes, both the lighting and the ventilation are turned off. The Pavilion system allows 4 project layers depending on what the client prefers:

A. Standard



Phone Booth STD (with Sensor or Sensor + Dimmer). It is not connected to any control / management system.




How to determine the number of Hubs per project


The number of Hubs per project should be studied based on the layout of the rooms and the project based on the following product specifications.

It is necessary to connect to the customer's network through the RJ45 connection provided by the Hub.

All wireless devices to be associated with the wireless hub must be within 22 m (71 ft) of the wireless hub and must be on the same floor as the hub.




B. Hub — Control

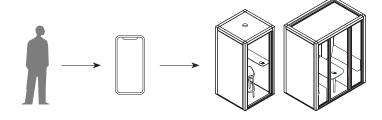

Allows the connection of each Phone Booth and Pavilion O to a Management Software for the client.

This is achieved through a HUB (which is installed in the customer's building), which must be connected to the network and which interconnects all rooms and Phone Booths.

Bacnet Integration

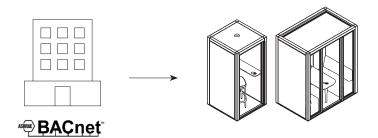

Allows the connection of each Phone Booth and Pavilion O to the building's BMS (Building Management System) system through the Bacnet IP protocol.


This is achieved through a Bacnet licensed Hub (which is installed in the customer's building), which must be connected to the network and which interconnects all rooms and Phone Booths.



Control

System's basic information

Operation through presence sensor: When the user enters, the lighting and ventilation are turned on. When the user leaves, after 15 minutes, both the lighting and the ventilation are turned off.





Response to demand

Bacnet integration


API integration

Wireless hub

Wireless controls and flexible sensors

- · Remote controls
- · Presence and daylight sensors
- · Lighting controllers
- · Home appliance charge controllers
- · Integrated luminaire sensors and control

Easy to use Software

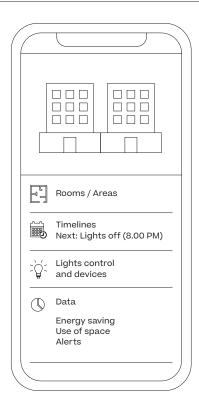

Communication protocols



Communicate by RF with control components



Communicate over WiFi with smart devices



Communicate via Ethernet cable to the hub



Security system

Safety by design

- Isolated wired or wireless architecture that strictly limits the ability of the hub's Wi-Fi to be used to access the corporate network to obtain confidential information.
- Distributed security architecture: each hub has its own keys.
- NIST-recommended best practices for password security, including tampering with and using Scrypt.
- 4. AES 128 bit encryption for network communications.
- 5. HTTPS protocol (TLS 1.2) to secure connections ;to the hub in the wired network.
- 6. WPA2 technology to ensure connections to the hub in the Wi-Fi network.

Third party validation

- 1. Various external experts involved during the design process.
- 2. Penetration tests carried out by third parties to identify and correct potential vulnerabilities before installation.

Monitoring and continuous improvements

A dedicated security team is used to constantly monitor potential threats and, when required, submit security patches to update installed systems.

Permanent support

- 1. IT implementation guidelines
- 2. Guidance from our world-class 24/7 technical support organization with IT expertise, throughout the product lifecycle

